


---

# FA250 HIGH POWER TRANSMITTER

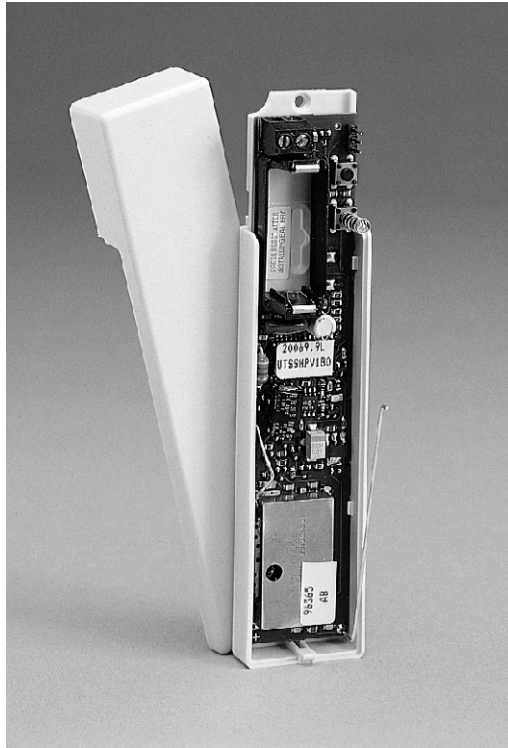

For use with any standard contact or sensor; this reduced-size universal transmitter comes with case tamper and supports an end-of-line resistor. A mounting bracket is provided for quick and easy installation. The transmitter can be supervised for both operational readiness and low battery conditions. A user-replaceable 3V lithium battery is included. With an open field line-of-site range of nearly 4 miles and utilizing spread spectrum technology, this transmitter has the power to torpedo through noisy environments assuring maximum reliability.

## FA250 Specifications:

Dimensions:	6"H x 1.25"W x .75"D	Battery life:	1 year
Weight:	3.2 oz.	Operating range:	32 deg. to 140 deg. F and up to 95% relative humidity (non-condensing)
Battery:	3.0V Lithium		

NOTE : The range of all wireless systems is dependent on the environment in which the equipment is operating. As a rough guide, radio waves pass through wood and plastic with very little loss of strength, pass through concrete, earth and living matter with more loss of strength, and are reflected by metal.